

ESD150NC120S / ESD150PC120S

Ultra-Fast Soft Recovery Diode Module


■ Features

- Repetitive Reverse Voltage : $V_{RRM} = 1200V$
- Low Forward Voltage Drop : $V_F(\text{typ.}) = 2.2V$
- Average Forward Current : $I_F(\text{AV.}) = 150A$ @ $T_c = 100^\circ\text{C}$
- Ultra-Fast Reverse Recovery Time : $t_{rr}(\text{typ.}) = 190\text{ns}$
- Extensive Characterization of Recovery Parameters
- Reduced EMI and RFI
- Isolation Type Package

■ Applications

- Welding Machine
- Induction Heating
- UPS

Equivalent Circuit and Package

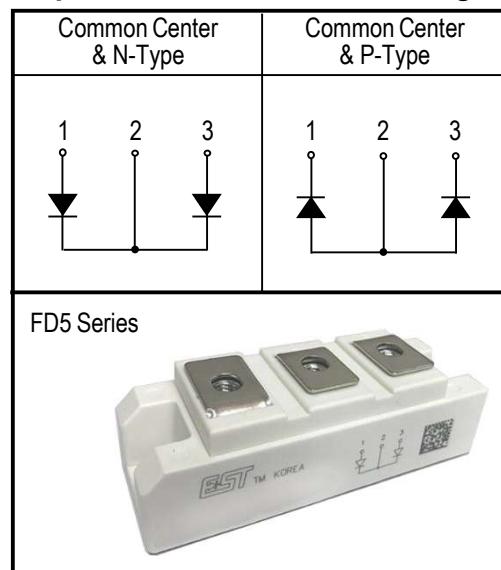

Please see the package Out line information

■ Absolute Maximum Ratings @ $T_c=25^\circ\text{C}$ (Per Leg)

Symbol	Parameter	Conditions	Ratings	Unit
V_{RRM}	Repetitive Peak Reverse Voltage		1200	V
$V_{R(\text{DC})}$	Reverse DC Voltage		960	V
$I_{F(\text{AV})}$	Average Forward Current	$T_c = 25^\circ\text{C}$ $T_c = 100^\circ\text{C}$	300	A
			150	A
$I_{FSM}^{(1)}$	Surge(non-repetitive) Forward Current	One Half Cycle at 60Hz, Peak Value	2100	A
I^2t	I^2t for Fusing	Value for One Cycle Current, $t_w = 8.3\text{ms}$, $T_j = 25^\circ\text{C}$ Start	1.83×10^4	A^2s
$T_j^{(2)}$	Junction Temperature	-	-40 ~ 125	$^\circ\text{C}$
T_{stg}	Storage Temperature	-	-40 ~ 125	$^\circ\text{C}$
V_{isol}	Isolation Voltage	@ AC 1 minutes	2500	V
P_d	Maximum Power Dissipation		960	W
-	Mounting screw torque	M6	4.0	N.m
-	Mounting terminals screw torque	M6	3.0	N.m

(Note *1) Repetitive rating : Pulse width limited by max junction temperature

(Note *2) The maximum junction temperature of chip is 150°C

■ Electrical Characteristics of FRD @ T_c=25°C (unless otherwise specified)

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
V _R	Cathode Anode Breakdown Voltage	I _R = 100uA	1200	-	-	V
V _{FM}	Maximum Forward Voltage	I _{FM} = 150A	T _j = 25°C	-	2.2	2.55
			T _j = 125°C	-	2.2	-
I _{RRM}	Repetitive Peak Reverse Current	T _C = 100°C, V _{RRM} applied	-	-	6.0	mA
t _{rr}	Reverse Recovery Time	I _{FM} = 150A, V _R = 600V di/dt=-600A/us	T _j = 25°C	-	190	230
			T _j = 125°C	-	270	-

■ Thermal Characteristics and Weight

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
R _{θJC}	Junction-to-Case	per FRD	-	-	0.18	°C/W
Weight	Weight of Module		-	-	120	g

■ Performance Curves

Fig. 1 Typical Forward Voltage Drop
vs. Instantaneous Current

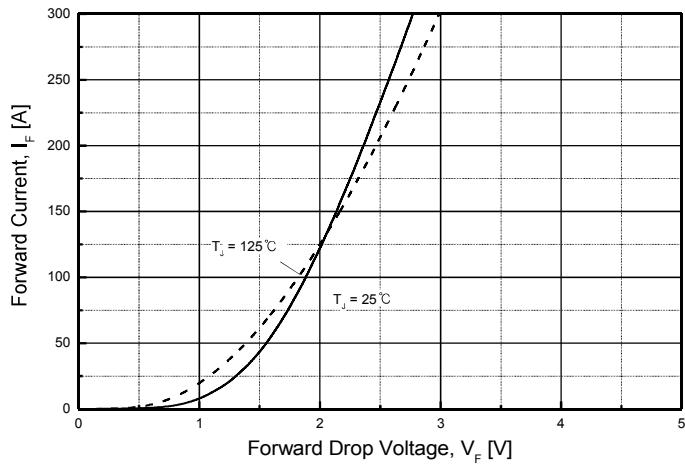


Fig. 2 Typical Reverse Recovery Time
vs. $-di/dt$

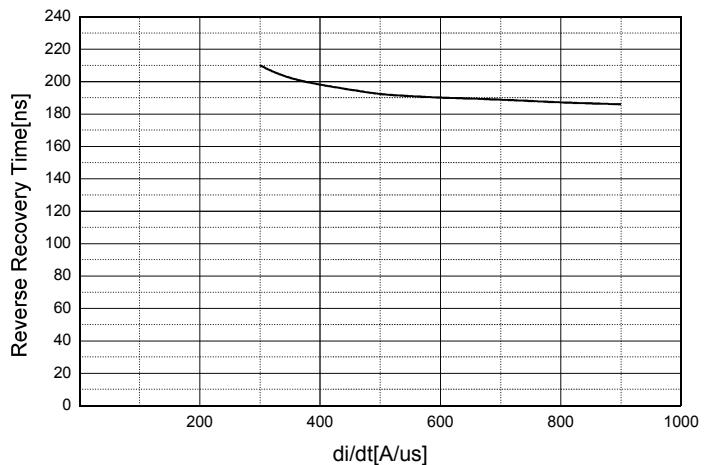


Fig. 3 Transient Thermal Impedance (Z_{thjc}) Characteristics



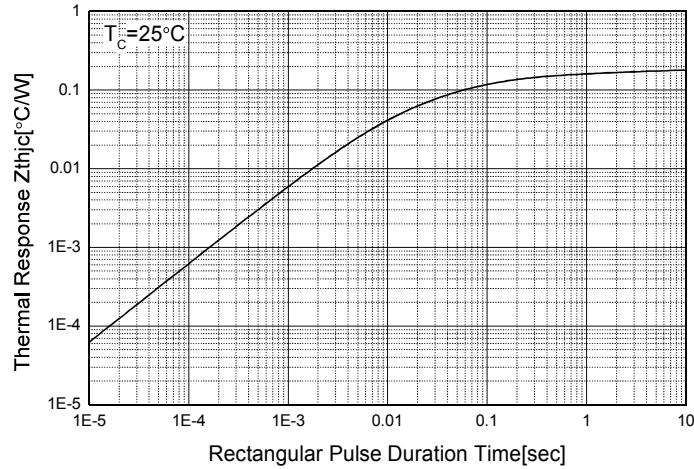


Fig. 4 Forward Current Derating Curve

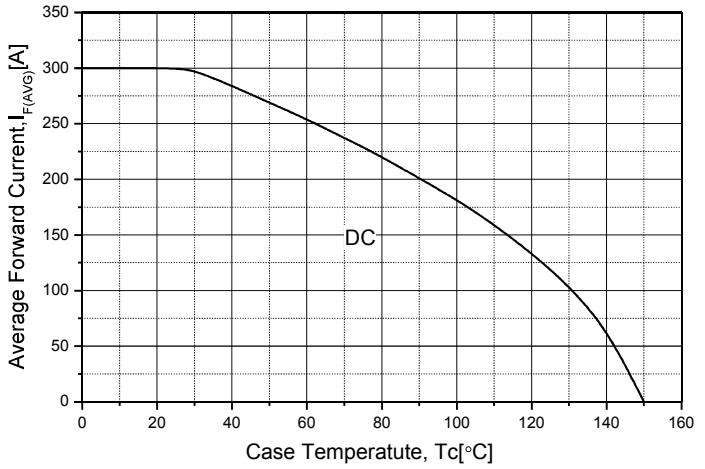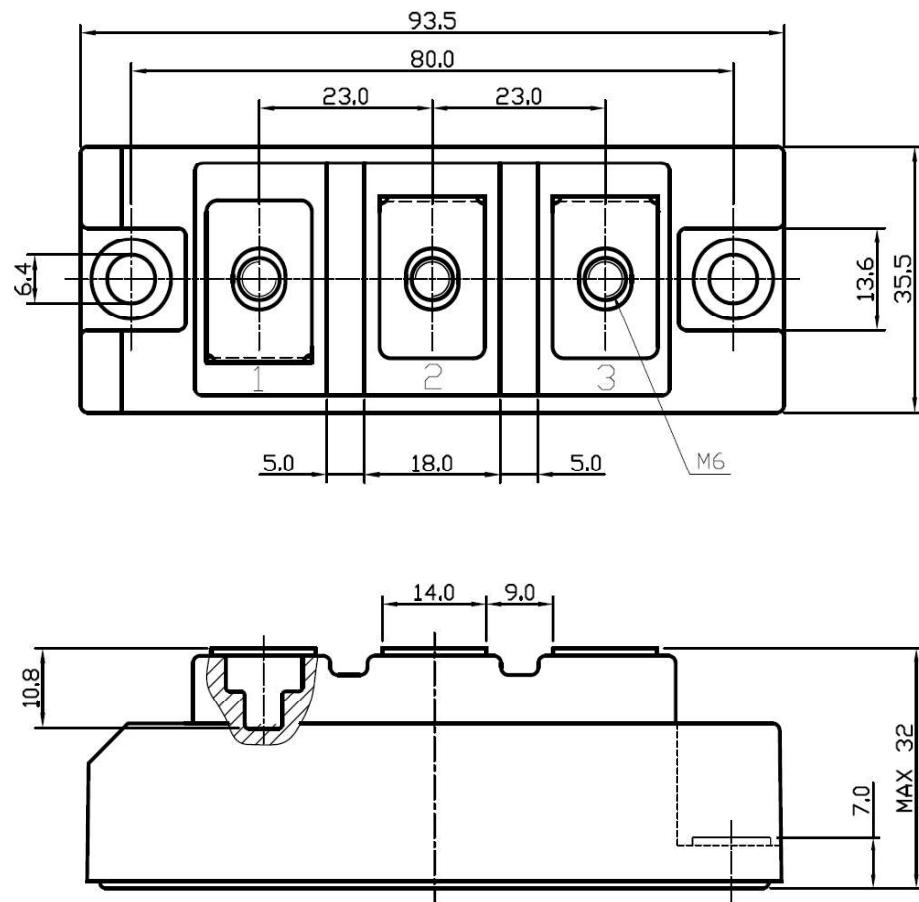

■ Package Out Line Information**FD5 Package**Dimensions in mm**■ Internal Circuit**

NC	PC
1 2 3	1 2 3
N Center	P Center